





Deloitte PL-4238 Pocket Mini-Speaker Teardown

Deloitte PL-4238 Pocket Mini-Speaker Teardown

Written By: ee460

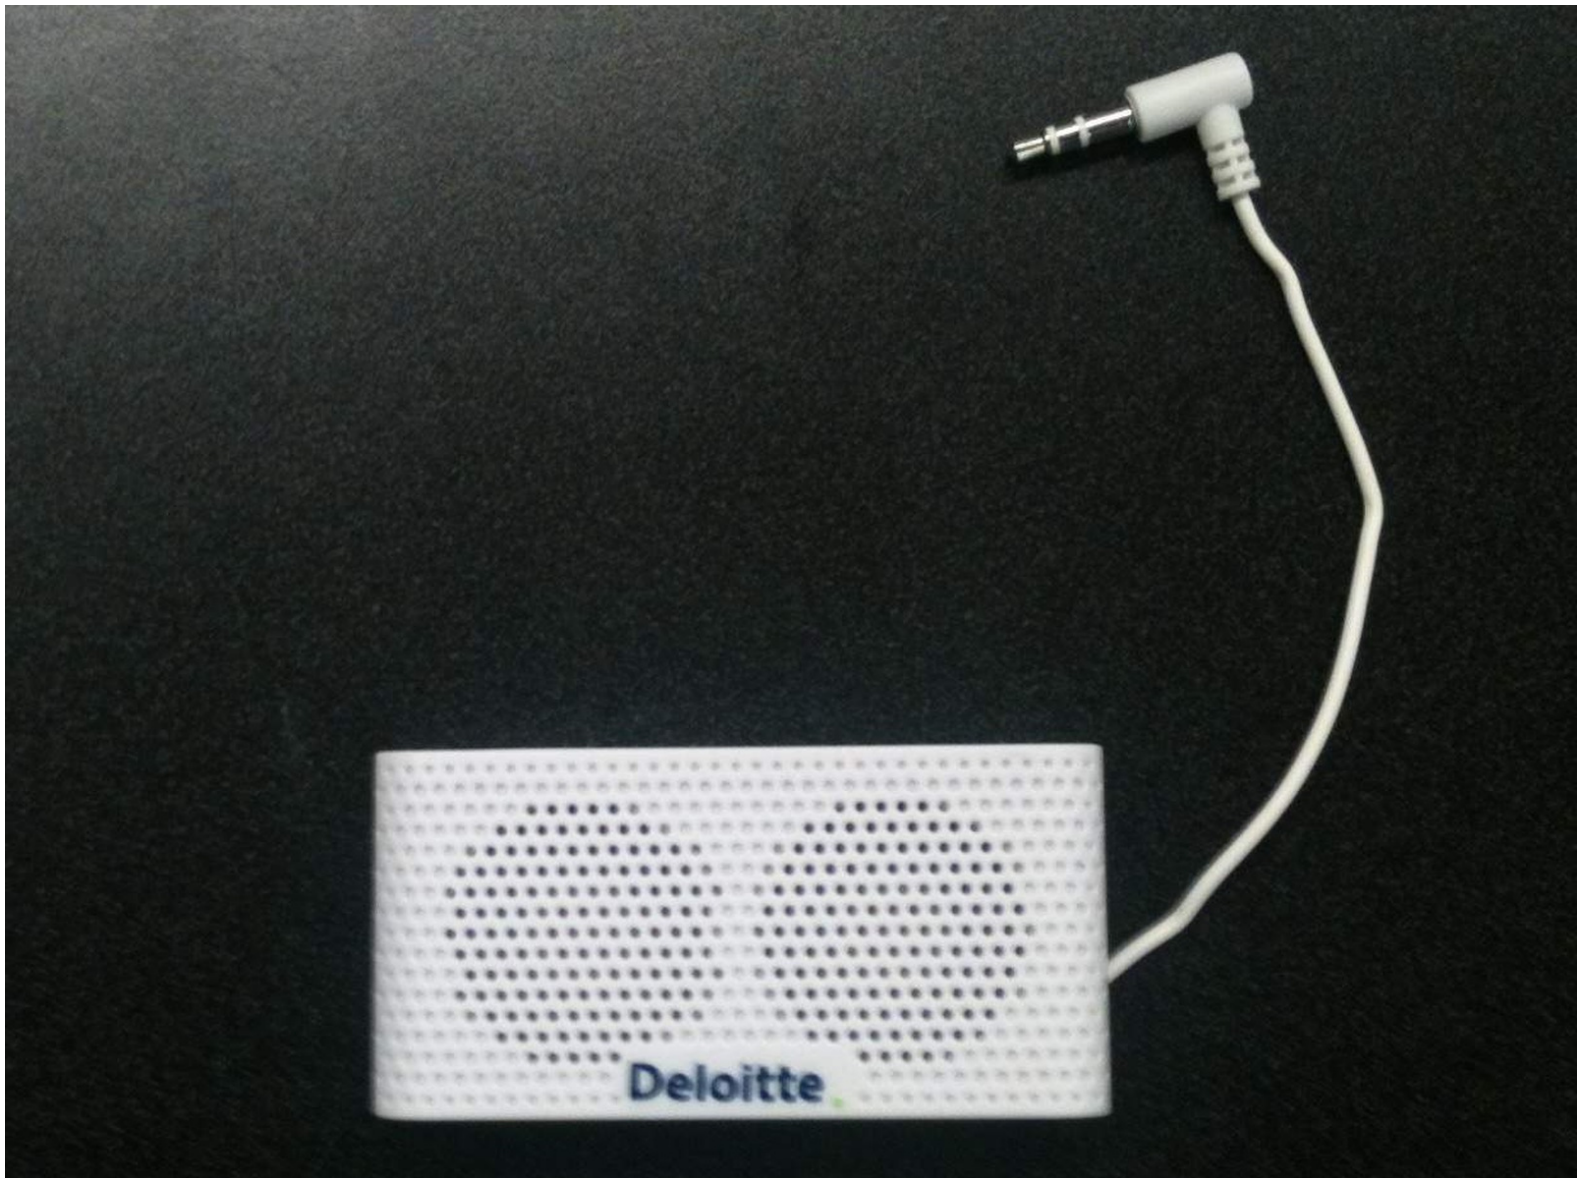


Step 1 — Deloitte PL-4238 Pocket Mini-Speaker Teardown

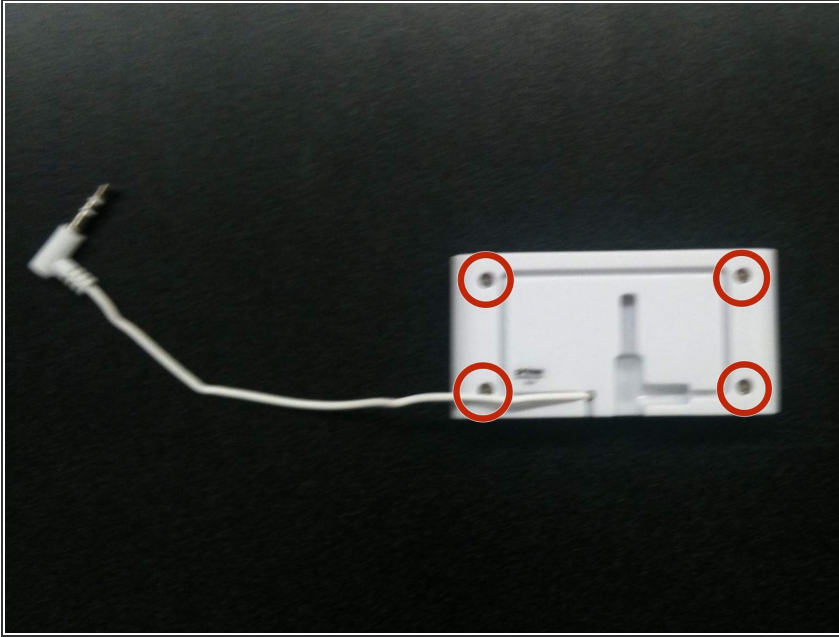


- There are 4x 2.5mm Phillips screws holding the casing together.
- Unscrew all four screws, and lift the back cover off.

Step 2

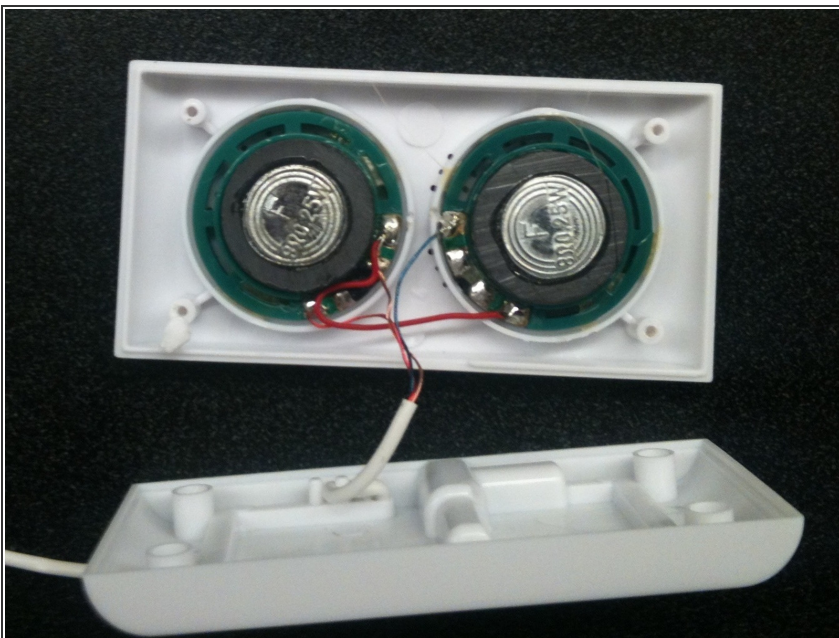

- You now have full access to all the wiring to the speakers.
- If you need to remove the speakers, there is a little bit of glue holding them in place. You can lift them out with your finger or flat headed screw driver.

Step 3

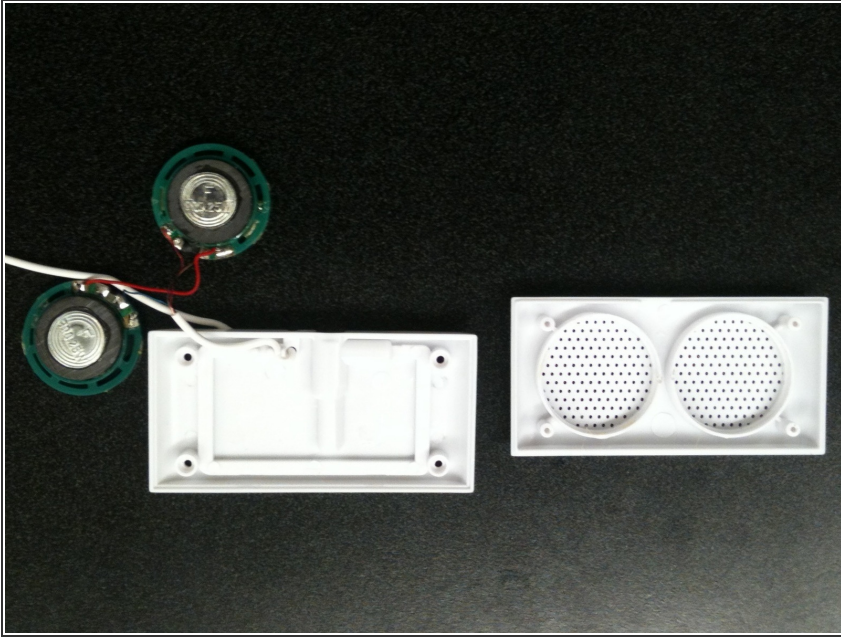

- This concludes the teardown of the Deloitte PL-4238 Pocket Mini-Speaker

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-09 01:36:57 AM.